



# Körapop 225-2K

<b>General Properties</b>	Technology/Base	silane-modified polymer
	Type of Product	adhesive and sealant
	Curing	polycondensation curing
	Mechanical Properties	elastic
	Parts	two part system
	Part A	Körapop 225
	Part B	Köracur 310 N Köracur 310 L Köracur 310 SL
	Color	black, white, grey
	Product Benefits	high cold resistance excellent moisture resistance excellent weather resistance cures also as one-component adhesive with humidity

## Technical Data

### Part A Körapop 225

<b>Physical Properties</b>		
Density	1.4 g/cm <sup>3</sup>	DIN EN 542
Solid-content by weight	100%	
<b>Processing Guidelines and Parameters</b>		
Storage Temperature	5 °C to 25 °C	

### Part B Köracur 310 N

<b>Physical Properties</b>		
Density	1.49 g/cm <sup>3</sup>	DIN EN 542
<b>Processing Guidelines and Parameters</b>		
Storage Temperature	15 °C to 25 °C	

### Part B Köracur 310 L

<b>Physical Properties</b>		
Density	1.49 g/cm <sup>3</sup>	DIN EN 542
<b>Processing Guidelines and Parameters</b>		
Storage Temperature	15 °C to 25 °C	

### Part B Köracur 310 SL

<b>Physical Properties</b>		
Density	1.49 g/cm <sup>3</sup>	DIN EN 542
<b>Processing Guidelines and Parameters</b>		
Storage Temperature	15 °C to 25 °C	

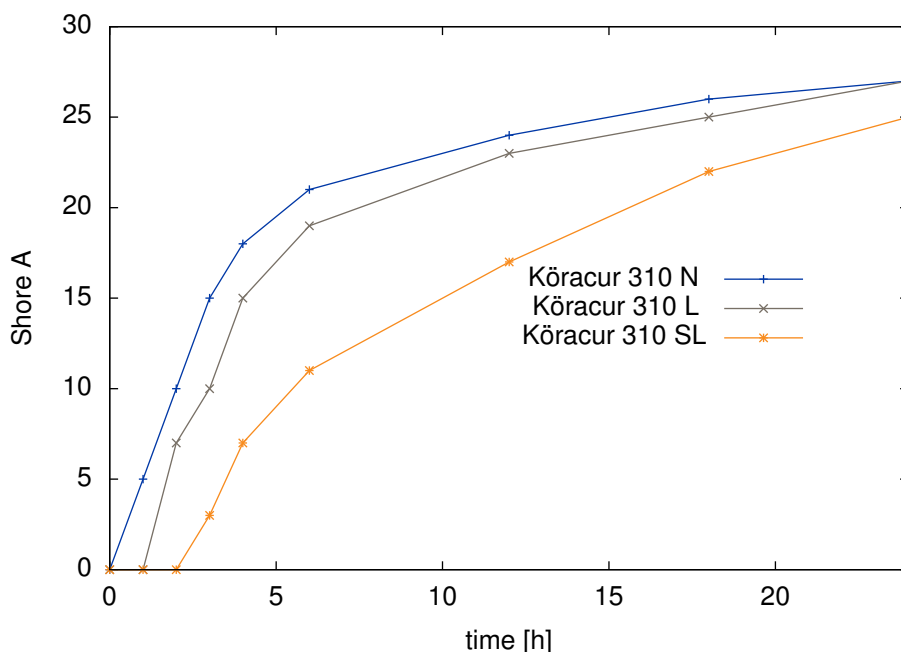


Figure 1: curing of Körapop 225-2K with different boosters, build up of Shore A

## General

<b>Physical Properties</b>		
Glass Transition Temperature	-64 °C	DIN EN ISO 6721-1
<b>Processing Guidelines and Parameters</b>		
Mixing Ratio (Part A : Part B) by Volume	10 : 1	
Processing Temperature	5 °C to 35 °C	
Recommended Minimum Layer Thickness	2 mm	
<b>Curing</b>		
Potlife	20 min	with Köracur 310 N
Potlife	40 min	with Köracur 310 L
Potlife	60 min	with Köracur 310 SL
Change in Volume	-3%	DIN EN ISO 10563
<b>Cured Material Characteristics</b>		
Shore Hardness (Type A)	36	DIN ISO 7619-1, after 14 d
Tensile Strength	2.6 MPa	DIN EN ISO 527
Elongation at Break	450%	DIN EN ISO 527
Tear Strength	18 N/mm	ASTM D624
<b>Service Conditions</b>		
Service Temperature	-60 °C to 90 °C	
Short-term temperature resistance	120 °C	60 min



### Product Properties

<b>Applications</b>	Fields of Application	automotive construction industrial assembly transportation
<b>Processing</b>	Suitable Substrates	various galvanized steels metals various aluminum alloys various steel alloys duroplastics thermoplastics (except PE, PP, PTFE) various composite materials (e.g. CFRP, GFRP) glass mineralic materials wood coated surfaces
	Consistency	non-sagging pasty
	Surface Requirements	clean free of grease
	Surface Cleaning	Körasolv GL Körasolv PU Körasolv WL
	Adhesion Promoter (absorbing surface)	Körabond HG 74 E
	Adhesion Promoter (non absorbing surface)	Körabond HG 83
	Application Method	using side-by-side cartridge with static mixer via two part mixing and metering systems
	Product Overpaintability	wet-in-wet (depending on paint)
	Product is free of	solvents
<b>Cleaning</b>	Cleaner for Tools	Körasolv GL Körasolv PU
<b>Hints</b>	Resistance against UV Radiation	Not suitable for glass bonding with permanent UV radiation to the bonding area. Please ask your local sales office for products suitable for such applications.
	Stress Cracking	Preliminary tests must be carried out on plastics with a tendency to stress cracking. (PMMA, ABS, PC or PS)
	Compatibility with Polystyrene Foams	Not suitable for bonding polystyrene foams. Please ask your local sales office for products suitable for such applications.



## Additional Information

### Storage

Körapop 225-2K should be used within the shelf life specified on the packaging. The storage stability only applies to material stored under appropriate conditions (original unopened containers, recommended storage temperature).

### Safety

Please read our Material Safety Data Sheet (MSDS) and the labels of each product before use. The valid safety regulations must be considered.

### Preparation

For some substrates the use of mechanical pre-treatment and/or cleaner or primer is necessary to achieve good adhesion. Refer to the product properties section of this data sheet for special surface requirements and suitable adhesion promoters.

### Processing

Refer to the technical data table regarding processing parameters. Low temperatures can cause a temporary increase in viscosity resulting in reduced extrusion and slower curing rates.

### Cleaning

Clean tools immediately after use. Once cured, the material can only be removed mechanically. Appropriate cleaners are listed in the product properties table. For further information please contact your local sales office.

### Dimensioning

The required thickness of the adhesive layer depends on the expected maximum strength and joint movement. We recommend a minimum layer thickness of 2 mm.

### Disposal

Please refer to the Material Safety Data Sheet (MSDS) for appropriate disposal instructions.

**IMPORTANT:** Information, specifications, procedures and recommendations provided (information) are based on our experience, and we believe this information to be accurate. No representation, guarantee or warranty is made as to the accuracy or completeness of the information or that use of the product will avoid losses or damages or give desired results. It is purchasers sole responsibility to test and determine the suitability of any product for the intended use. Tests should be repeated if materials or conditions change in any way. No employee, distributor or agent has any right to change these facts and offer a guarantee of performance.

**NOTE TO USER:** by ordering/receiving product, you accept the **H.B. Fuller General Terms and Conditions of Sale** applicable in the region. Please request a copy if you have not received this documentation. These Terms and Conditions contain disclaimers of implied warranties (including but not limited to disclaiming warranties of fitness for a particular purpose) and limits of liability. All other terms are rejected. In any event, (1) **the total aggregate liability of H.B. Fuller** for any claim or series of related claims, however arising, in contract, tort (including negligence), breach of statutory duty, misrepresentation, strict liability, or otherwise, **is limited to replacement of affected products or refund of the purchase price for affected products.** (2) H.B. Fuller **shall not be liable for loss of profit, loss of margin, loss of contract, loss of business, loss of goodwill, or any indirect or consequential losses** arising out of or in connection with product supply. (3) Nothing in any term shall operate to exclude or limit H.B. Fullers liability for fraud, gross negligence, death, or personal injury caused by negligence, or for breach of any mandatory implied terms unless permitted by law.