



90TL

90TL is a low viscosity and high capillary action for locking and sealing threaded fasteners and close fittings parts after assembly, also to penetrate and seal metal porosity in moulds and incastings. Medium to high strength locking. Highly resistant to heat, corrosion, vibrations, water, gases, oils, hydrocarbons, and many chemicals.

Technology / Base	Dimethacrylate Ester
Type of Product	Threadlocking Adhesive and Sealant
Components	One Component
Curing	Anaerobic with Secondary Heat Cure
Appearance / Color	Green
Consistency	Wicking Liquid

Features and Benefits

- Fluorescent UV Indicator
- Highly Resistant to Heat, Corrosion, Vibrations, Water, Gases, Oils, Hydrocarbons, and Many Chemicals
- Medium to High Strength
- High Capillary Action

Technical Data

Physical Property	Value	Condition/Method	
Uncured Material Characteristics			
Viscosity	10 to 55 cPs	Cannon-Fenske, #150, 25°C	
Specific Gravity	1.08		
Flash Point	> 93°C		
Shelf Life	12 months unopened		
Storage Condition	8 to 28°C		
Gap Fill	0.05 mm maximum		
Set Time on Steel	15		
Full Cure Conditions	4 to 72 hours at room temperature, or 40°C bondline temperature for 1 hour to achieve 100% of strength on steel		
Cured Material Properties			
Coefficient of Thermal Expansion	80 ppm/K	ASTM D696	
Thermal Conductivity	0.1 W/mK	ASTM C177	
Specific Heat	0.3 kJ/kgK		
Breakaway Torque	3 to 17 N-m	ISO 10964	
Breakloose Torque	15 to 45 N-m	DIN 54454	
Service Temperature	-55°C to 150°C		
Cure Speed At Various Temperatures			
	25%	50%	100%
5°C	3 hrs	5 hrs	15 to 72 hrs
40°C	10 min	20 min	1 to 72 hrs
Cure Speed On Various Substrates			
	25%	50%	100%
Steel	25 min	45 min	4 to 72 hrs
Stainless Steel	4 hrs		
Zn Dichromate	25 min	45 min	4 to 72 hrs



Technical Data

Physical Property	Value	Condition/Method
Heat Aging Testing		
2000 hrs at 120°C	45%	Room Temperature Strength
2000 hrs at 150°C	15%	Room Temperature Strength
Chemical Resistance Testing		
	Test Temperature	% of Room Temperature Strength
50% Water/50% Glycol	87°C	90%
Unleaded Gasoline	22°C	90%
Motor Oil	125°C	50%
Brake Fluid	22°C	85%
Acetone	22°C	85%
		Condition
		1000 hours measured at room conditions
		1000 hours measured at room conditions
		1000 hours measured at room conditions
		1000 hours measured at room conditions
		1000 hours measured at room conditions

General Instructions

Surfaces to be bonded should be clean and dry and free of grease. Product should be applied in enough quantity to fill all engaged threads or gap. The product performs best in thin bond gaps. Very large gaps may create gaps that will affect the cure speed and overall strength. Good contact is essential. It is recommended to confirm compatibility of the product with all substrates prior to use. This product is not recommended for use with strong oxidizing materials. Where aqueous washing systems are used to clean the surfaces before bonding, these aqueous washes can affect the cure and performance of the adhesive. This product is not normally recommended for use on plastics, users must check compatibility of the product with such substrates.

Specifications

ASTM D-5363 AN 0261


Storage

Products should be stored unopened in a cool, dry place out of direct sunlight. Products may be refrigerated for improved shelf life, but should be brought back to room temperature before use.

Safety and Disposal

For complete safety and handling information, please refer to the appropriate Safety Data Sheets prior to using this product.

Hot Strength (%RT strength, tested at temperature)

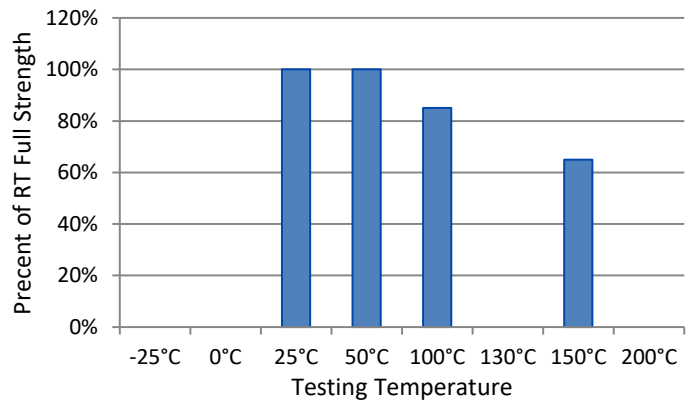

Curing Performance

The rate of cure will depend on environmental conditions and the substrates used. The gap of the bond line will affect set speed. Smaller gaps tend to increase set speed. Activators may be applied to further improve set speed, but may also impair overall adhesive performance.

H.B. Fuller Company
 9001 W. Fey Drive
 Frankfort, IL 60423
 +1.800.552.0314

www.hbfuller.com

www.hbfullerengineering.com

Connecting what matters.™

IMPORTANT: Information, specifications, procedures and recommendations provided ("information") are based on our experience, and we believe this information to be accurate. No representation, guarantee or warranty is made as to the accuracy or completeness of the information or that use of the product will avoid losses or damages or give desired results. It is purchaser's sole responsibility to test and determine the suitability of any product for the intended use. Tests should be repeated if materials or conditions change in any way. No employee, distributor or agent has any right to change these facts and offer a guarantee of performance.

® and ™ are trademarks of H.B. Fuller Company or one of its affiliated entities.

NOTE TO USER: by ordering/receiving product you accept the H.B. Fuller General Terms and Conditions of Sale applicable in the region. Please request a copy if you have not received these. These Terms and Conditions contain disclaimers of implied warranties (including but not limited to disclaiming warranties of fitness for a particular purpose) and limits of liability. All other terms are rejected. In any event, the total aggregate liability of H.B. Fuller for any claim or series of related claims however arising, in contract, tort (including negligence), breach of statutory duty, misrepresentation, strict liability or otherwise, is limited to replacement of affected products or refund of the purchase price for affected products. H.B. Fuller shall not be liable for loss of profit, loss of margin, loss of contract, loss of business, loss of goodwill or any indirect or consequential losses arising out of or in connection with product supply.



H.B. Fuller
www.hbfuller.com